



Electrical specifications

Device type

UHF RFID / EPCglobal Gen2v2

Operational frequency

Global 865-928MHz

IC type

Impinj M780™

Memory configuration

EPC 496 bit; User 128 bit; TID 96 bit

EPC memory content

Unique random 96bit EPC in every label

Read range (2W ERP)*

- On plastic up to 23 m / 75 ft
- On cardboard up to 20 m / 65 ft

Applicable surface materials*

Non-metallic surfaces. Works well also on boxes where content varies from fruits, vegetables or other groceries to liquid bottles and utilities.

* Read ranges are theoretical values that are calculated for non-reflective environment. Different surface materials may influence performance.



Description

Special washable label for returnable plastic containers with great performance even when being close to challenging materials.



Mechanical specifications

Tag materials

Printable white PET, resin ribbon recommended

Background adhesive

High performance acrylic adhesive specifically for low surface energy plastics

Weight

0,8 g

Delivery format

2000 pcs on reel

Pitch on reel


28,575 mm / 1,125 in

Reel core inner diameter

76 mm / 3 in

Tag dimensions

92 x 24 x 0,2 mm /
3.62 x 0.94 x 0.01 in

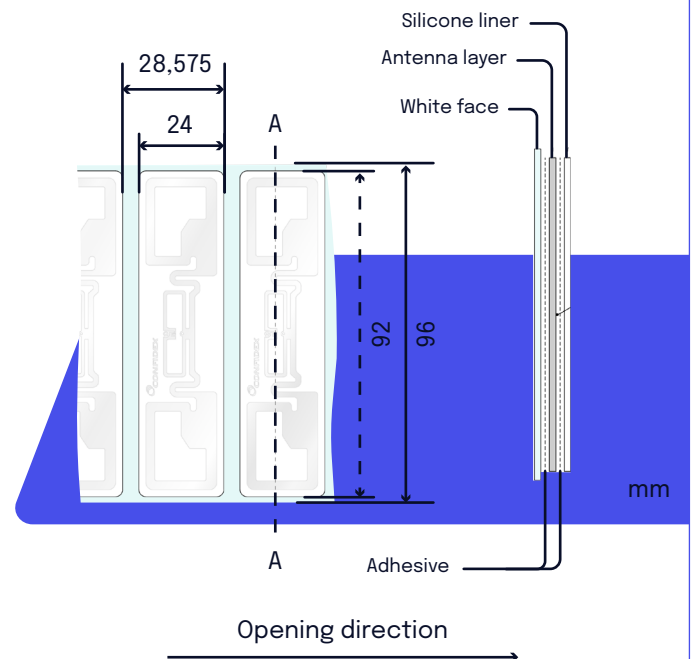



Environmental resistance

Operating temperature

-35°C to +85°C / -31°F to +185°F

Ambient temperature

-35°C to +85°C / -31°F to +185°F

IP classification

IP68, tested 5 hours in 1m deep water

Washing resistance

Tolerates industrial washing processes. Tested according to IPX9K with water at 60° angle, 80-100bar, and 80°C. Water flow rate 14-16l/min.

Chemical resistance

No physical or performance changes in:

- 168h Salt water (salinity 10%) exposure
- 168h Motor oil exposure
- 168h Sulfuric acid (10%, pH 2) exposure
- 24h NaOH (10%, pH 13) exposure
- 20min Acetone exposure

Storage condition

1 year in +20°C / 50% RH (shelf life for adhesive)

Expected lifetime


Years in normal operating conditions

Values in the table are the best recommendations; resistance against environmental conditions depends on the combination of all influencing factors, exposure duration and chemical concentrations. Thus, product's final suitability for certain environmental conditions is recommended to be tested. Contact Beontag for more specific information.




Installation instructions

Tag polarization

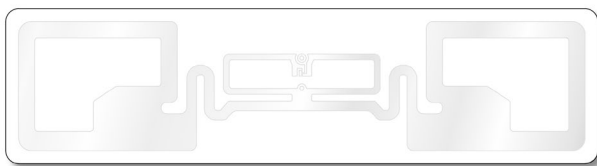


While planning the installation, most recommended location for the Beontag Carrier PRO label is in a position, where the structure of the identified asset provides protection against mechanical stresses such as impacts or jet streams. There's no need for line of sight between reader and label so it can be installed for example like shown in picture below.

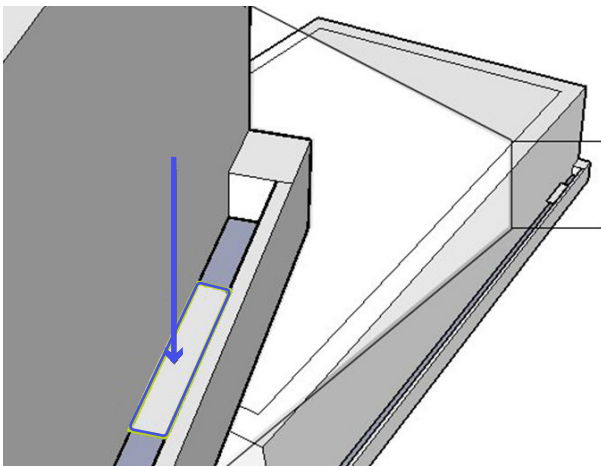

Ideal installation conditions are +20°C (+68°F) / 50% RH. For exceptional conditions, please contact Confidex. Adhesive of the label will provide best adhesion in 24 hours after the installation. Bond strength can be improved with firm application pressure. Always clean and dry the surface for obtaining the maximum bond strength. During attachment to the identified asset, please avoid touching the background adhesive. If the location on the asset needs to be changed, please use a new tag instead of re-placing the used one; the adhesion will suffer from the re-placement. Minimum bending diameter of the Beontag Carrier PRO is defined to be 50mm. Do not bend the label below the limit. Never touch the IC location. IC is a sensitive electrical component and can be damaged if unexpected pressure is applied on it.



Radiation pattern

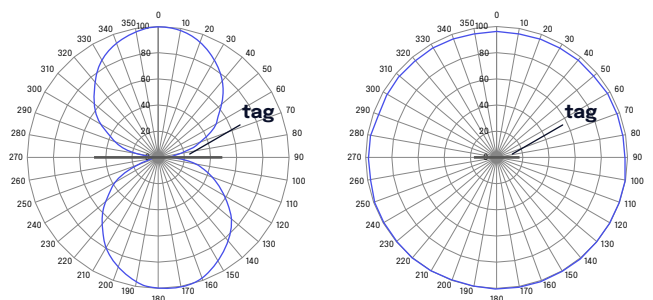

**Personalization options****Pre-encoding**

Customer-specific encoding of EPC or user memory. Locking permanently or with password.

Customized printing

Customer-specific layout including logo, text, numbers, barcodes etc.

**Order information**

Product number: **3004654**

Product Name: **Beontag Carrier PRO M780**

For other versions, additional information and technical support please contact Beontag.

DISCLAIMER

THE MATERIALS, PRODUCTS AND SERVICES ARE SOLD SUBJECT TO ITS STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, BEONTAG MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN BEONTAG STANDARD CONDITIONS OF SALE, BEONTAG AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Beontag products, materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished systems incorporating Beontag products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Beontag.

About Beontag

From the science of graphic and label materials, RFID and wireless IoT enablers, we create solutions across the value chain to deliver digital transformation for businesses around the world.

Sustainability is at the core of what we do and we strongly believe that by substituting non-renewable materials and innovating through more sustainable and renewable products, we act as an ESG enabler for our customers' value chain.

Beontag is one of the world's leading providers of RFID and wireless IoT solutions, being present in more than 40 countries with 7 R&D centers and 2,000 employees, in constant development of technological and sustainable solutions designed to connect items, and gain efficiency and end-to-end traceability

**CONTACT US FOR
MORE INFORMATIONS:
[beontag.com](https://www.beontag.com)**

The performance of the product should always be tested in the actual application conditions. Our recommendations are based on our most current knowledge and experience and the pictures and illustrations presented in this document are for illustration purposes only. As our products are used in conditions beyond our control, we cannot assume any liability for damage caused through their use. Beontag reserves the right to change its products and services at any time without notice.

