




AX'Label Platina 60x25 UHF

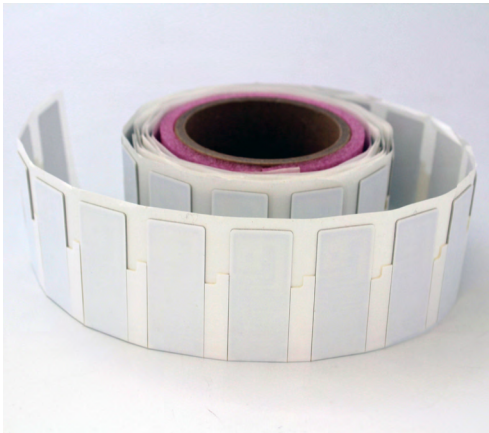

This label is part of our range of UHF metal compatible labels range: AX'Label Platina.

The entire range of labels has a PET protective top layer that can be customized with text, logo, barcode, QR codes....

AX'Label Platina are compatible with Toshiba **BA410 printer**.

For use in an extremely harsh environment, reinforce your AX'Label with the **Protect+** protective film. Your AX'Label becomes AX'Label + capable of resisting water, dust, abrasion, and UV rays.

Item reference : *ETUHF1416EU*

Functional specifications

RFID Protocol	EPC global and ISO 18000-63 compliant, Gen2v2 compliant
Frequency	(EU) 865-868MHz, (US) 902-928MHz
IC type	Monza R6P
Memory	User memory: 32(64)bits ; EPC memory: 128(96) bits
Write Cycles	100,000 times
Functionalities	Read/write
Data Retention	Up to 50 years
Applicable Surface	On metal

Physical specifications

Size	60*25mm
Thickness	1mm
Mounting Methods	Adhesive (standard or strong)
Packaging	500pcs roll on 76 mm mandrel


Environmental specifications

Storage Temperature	-40°C to +85°C
Operating Temperature	-40°C to +85°C

More about AX'Label Platina UHF range :



Measured read range

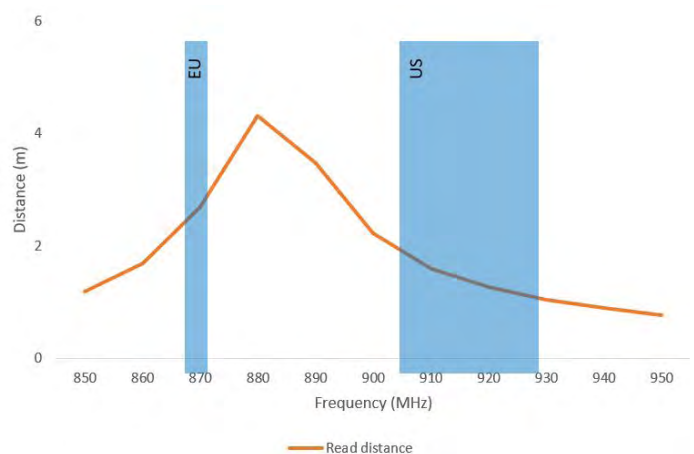

V3.1
Non-contractual datasheet